

# MOL 2275 / 2800 Oil Burner



## **MOL 2275/2800 Oil Burner features:**


- Energy saving and compatible with environmental requirements
- Quiet in operation and designed for easy maintenance
- Reliable and trouble-free
- Designed and approved in accordance with the European Standard EN 267
- Suitable for high resistance boilers
- Industry standard components easily available
- 2 stage or fully modulating operation
- Plug-in contact facilitates the installation
- Fuel – Light distillate oil Class D (1.5-5.5 cSt @ 40°C)
- All kW ratings are nett CV



For more information on Mechmar products  
please visit [www.mechmar.com.sg](http://www.mechmar.com.sg)

**MECHMAR**®

Type		MOL 2275 HIGH/LOW		MOL 2800 HIGH/LOW		MOL 2800 MODULATING	
Capacity	kW	1750-2300		1750-2750		1750-2750	
Motor	V/Hz	400 / 50		400 / 50		400/50	
	kW / A (MCB)	2275-38	5.5 / 3 x 16	2800-38	7.5 / 3 x 20	2800-38	7.5 / 3 x 20
				2800-41	11 / 3 x 32	2800-41	11 / 3 x 32
				2800-44	15 / 3 x 40	2800-44	15 / 3 x 40
Start/Run Current	Amps	2275-38	46.0 / 11.0	2800-38	60 / 14.4	2800-38	60 / 14.4
				2800-41	72 / 22.8	2800-41	72 / 22.8
				2800-44	92 / 29.3	2800-44	92 / 29.3
Control box		Satronic		Satronic		Satronic	
Fuel pump		Suntec/HP Technik		Suntec/HP Technik		Suntec/HP Technik	
2-Stage		•		•		•	
Gross weight	kg	365		365		365	
Volume	m <sup>3</sup>	1.872		1.872		1.872	

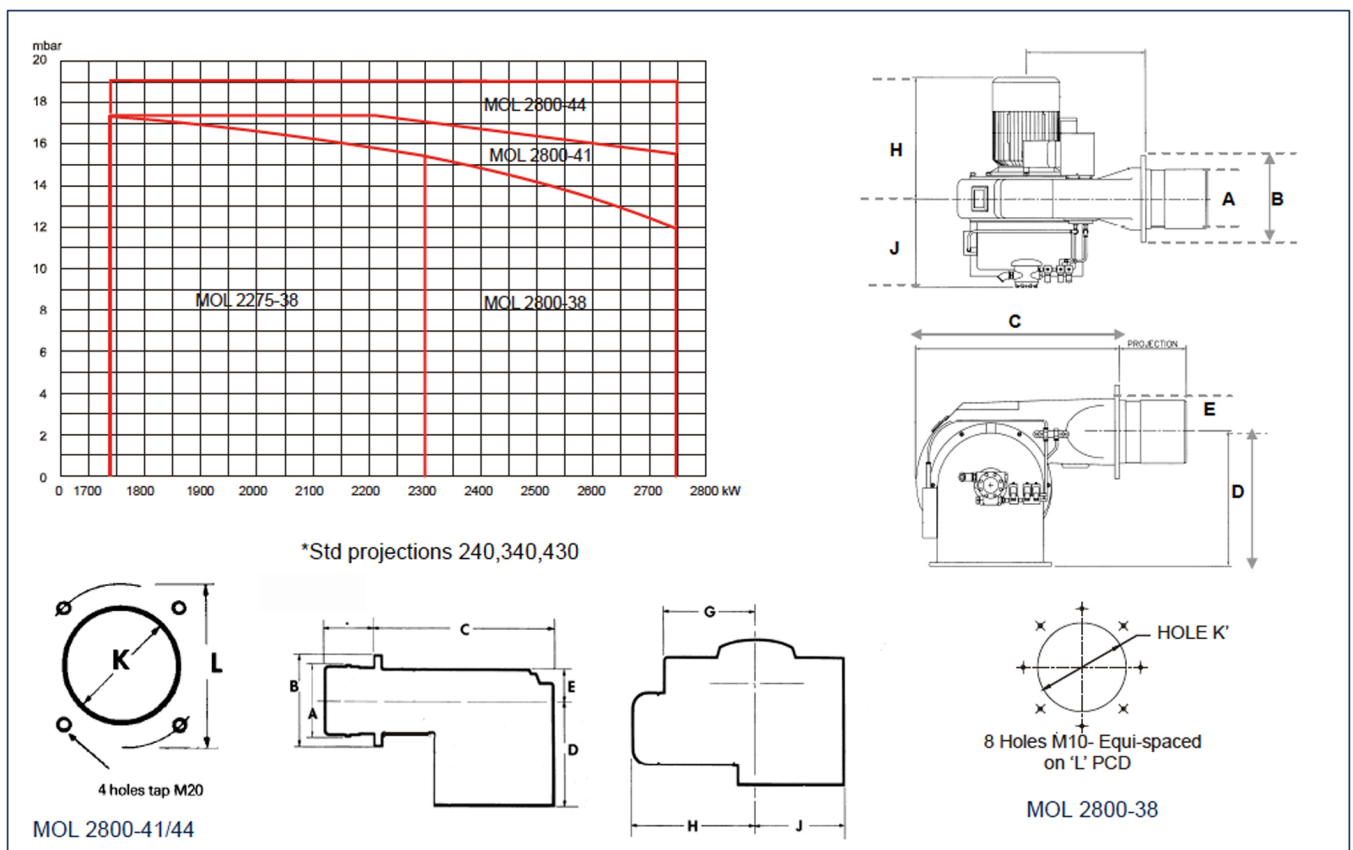

Burner	A	B	C	D	E	G	H	J	K	L PCD
MOL 2275-38 T3	254	330	725	475	125	-	537	340	280	305
MOL 2800-38 T3	254	330	730	475	125	-	537	340	280	305
MOL 2800-41 T3	325	420	950	565	145	535	640	435	330	454
MOL 2800-44 T3	325	420	950	565	145	485	640	435	330	454
MOL 2800-38 M3	255	330	1015	480	125	485	537	430	280	305
MOL 2800-41 M3	325	420	1240	565	145	535	640	430	330	454
MOL 2800-44 M3	325	420	1240	565	145	535	640	430	330	454

\* Extended Lengths Available

### MECHMAR (PTE) LTD

56 Kian Teck Road Singapore 628791

Tel: 6268 3048 Fax: 6261 4049

E-mail: mechmar@singnet.com.sg

Website: www.mechmar.com.sg

**MECHMAR**®